

Description

These CME-7001 and CME-7002 Auxiliary Switches are designed to start and stop auxiliary items such as electric heat or fans, or to indicate an actuator's fully open or closed position.

Models are available with single or dual switches and mount to KMC Controls MEP-7000 Series actuators. Switches are independently adjustable for a trip point anywhere within the angular rotation of the driving actuator.

Features

- ◆ Single or dual switch models
- ◆ Fully adjustable over actuator's 0 to 90° rotation
- ◆ Pre-cabled connections

Application

The CME-7001 and CME-7002 are designed to work with any KMC MEP-7000 Series actuator.






Models

CME-7001	Single Auxiliary Switch, 1 SPDT
CME-7002	Double Auxiliary Switch, 2 SPDT

Details

All dimensions are in inches (mm).

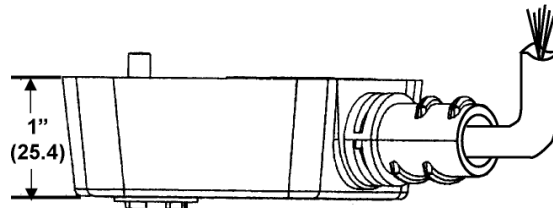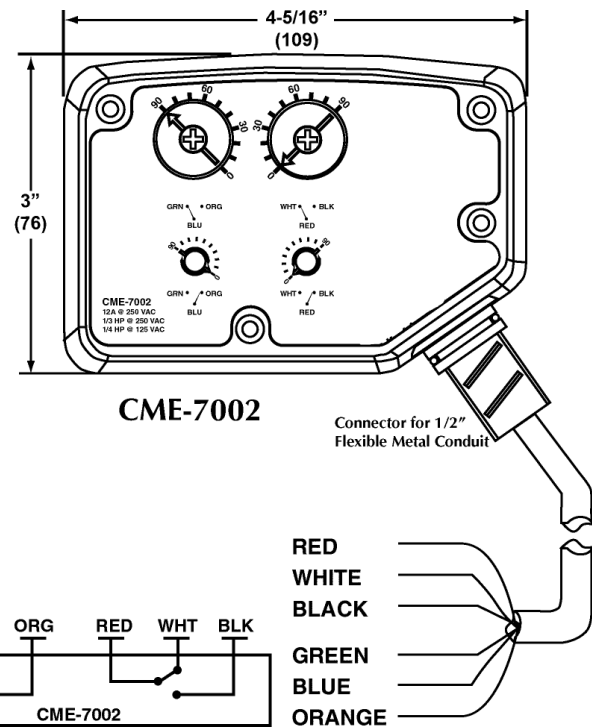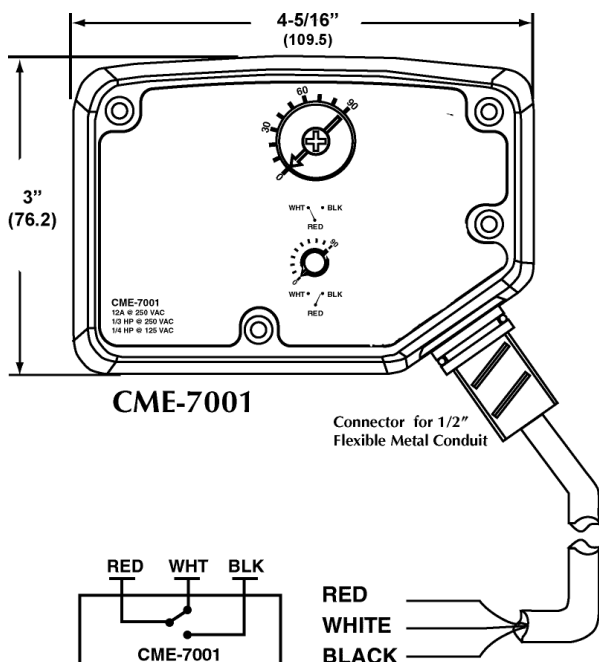

Specifications

Switch Rating	12A @ 250 VAC 1/3 HP @ 250 VAC 1/4 HP @ 125 VAC
Switch Point	Fully adjustable over 0 to 90° actuator rotation
Connection	3 ft., 18 gauge cable
Material	Black UL94-5V flame retardant polymer
Weight	CME-7001; 5.6 oz. (159 g) CME-7002; 6.6 oz. (187 g)
Temperature Limits	
Operating	-5° to 120° F (-21° to 49° C)
Shipping	-40° to 140° F (-40° to 60° C)

KMC Controls, Inc.

19476 Industrial Drive

New Paris, IN 46553

574.831.5250

www.kmccontrols.com