



# CTE-5001, 5011 Room Thermostat DA Cooling or RA Heating Single Temperature

## Description

KMC CTE-5001/5011 Room Thermostats are designed for use with certain CEP/CSP series controller-actuators to control dampers and/or valves in HVAC systems.

These are single setpoint thermostats providing DA cooling or RA heating selectable by jumper placement and wiring terminations. Several mounting methods are available with electrical boxes, toggle bolts or backplates.

These economical thermostats provide precise control while offering a unique ability to adjust the minimum and maximum control points at the thermostat rather than at the controller-actuator.

Thermostats come with a blank cover and choice of optional decorative inserts to match most decors. The setpoint adjustment and indication are exposed but can be hidden by installing the optional setpoint cover.

## Features

- ◆ Single setpoint room thermostats
- ◆ Selectable as DA cooling or RA Heating

## Models

The following models are available:

CTE-5001-10	Ash white, °F
CTE-5001-11	Ash white, °C
CTE-5011-10	Light almond, °F
CTE-5011-11	Light almond, °C



## Application

The CTE-5001/5011 Room Thermostats are intended for use with the following controller/electric actuators:

- CEE-4000 Series
- CEP-4000 Series
- CSE-4000 Series
- CSP-4000 Series


## Accessories

The following accessories are available:

HMO-5014	Standoff, light almond
HMO-5016	Standoff, ash white
HMO-5036	Vertical backplate, light almond
HMO-5037	Vertical backplate, ash white
HMO-5038	Horizontal backplate, ash white
HMO-5039	Horizontal backplate, light almond
HPO-0031	Setpoint cover, ash white
HPO-0032	Setpoint cover, light almond
XEE-4002	9.1 VDC, ± 5% Power supply

## Details

All dimensions are in inches (mm)

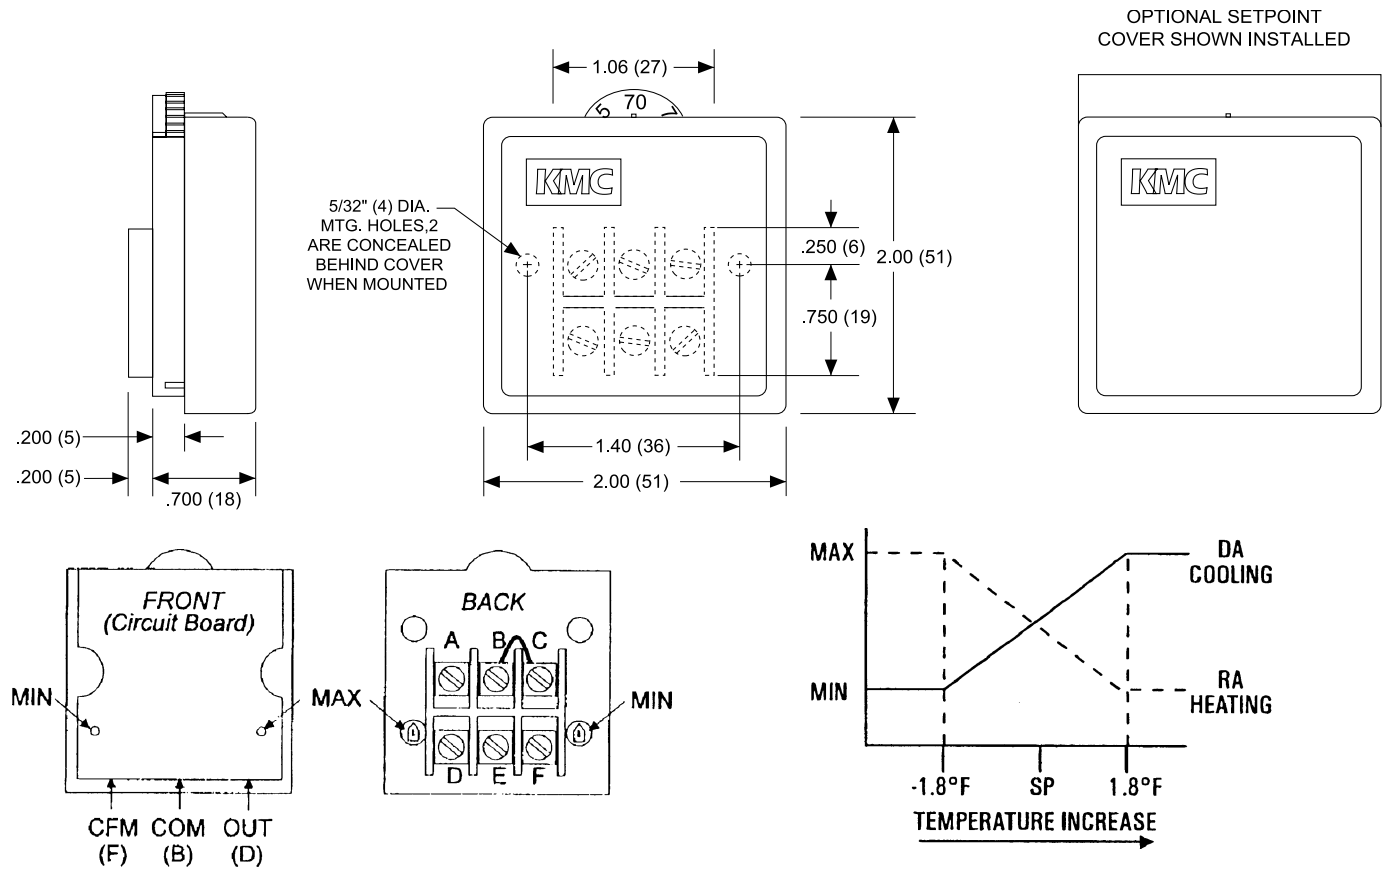

## Specifications

<b>Supply Voltage</b>	9.1 VDC $\pm 5\%$
<b>Output Range</b>	0 to 6 VDC
<b>Temperature Range</b>	54° to 90° F (12° to 32° C)
<b>Proportional Band</b>	3.6° F (2° C)
<b>Thermostat Action</b>	Direct (DA) or Reverse (RA) Acting
<b>Cover Type</b>	Blank w/setpoint indicator
<b>Material</b>	Ash white or light Almond ABS, UL Flame class 94 HB
<b>Size</b>	2" (51 mm) square
<b>Weight</b>	1.25 oz. (35 grams)
<b>Temperature Limits</b>	
Operating	40° to 120°F (4° to 49°C)
Shipping	-40° to 140°F (-40° to 60°C)

**KMC Controls, Inc.**  
 19476 Industrial Drive  
 New Paris, IN 46553  
 574.831.5250  
[www.kmccontrols.com](http://www.kmccontrols.com)